


การ Ping และ Trace เพื่อตรวจสอบการเชื่อมต่ออุปกรณ์เครือข่าย

1. เปิด Browser พิมพ์ **192.168.1.1** ในช่อง Address แล้วกด **Enter**



2. ใส่ Username: **admin** และ Password: **aisadmin** แล้วกด **Login**

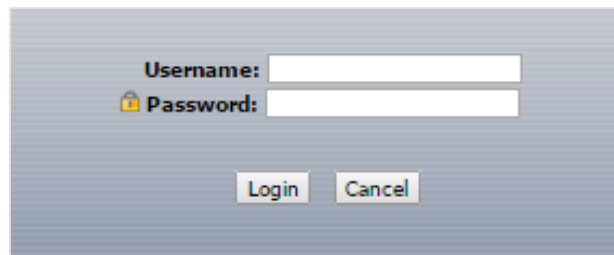


Username:

Password:

Login Cancel

3. หลังจากที Login แล้ว จะเข้าสู่หน้า Setup ซึ่งแสดงข้อมูลต่างๆ

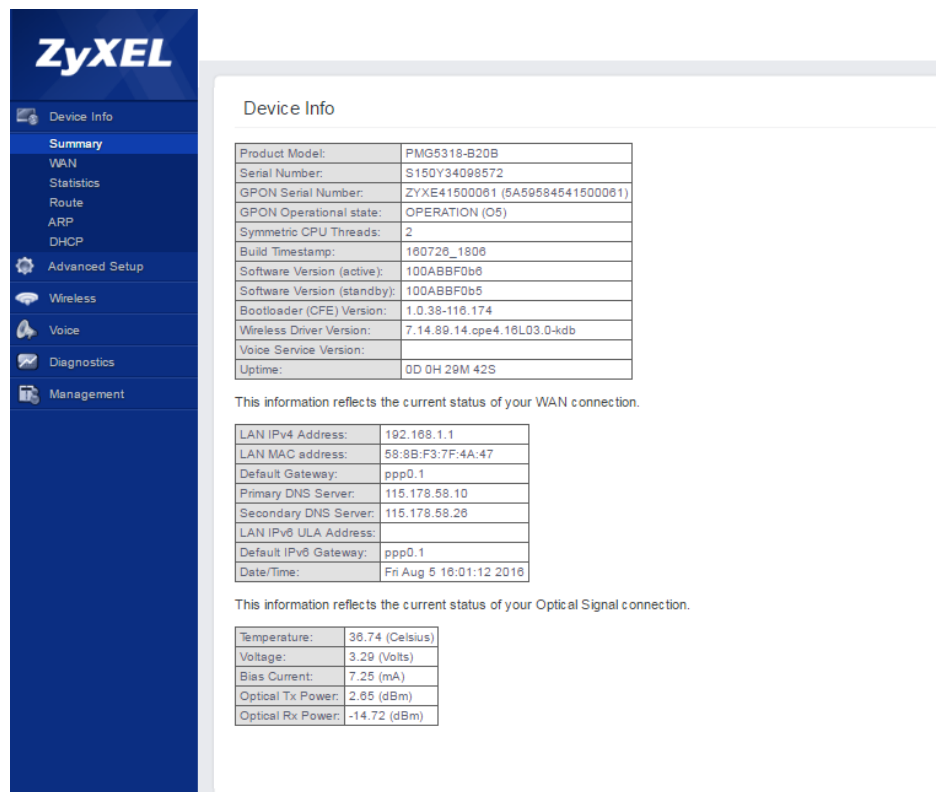

ZyXEL

Device Info

Product Model:	PMG5318-B20B
Serial Number:	S150Y34098572
GPON Serial Number:	ZYXE41500061 (5A59584541500061)
GPON Operational state:	OPERATION (O5)
Symmetric CPU Threads:	2
Build Timestamp:	160726_1806
Software Version (active):	100ABBF0b6
Software Version (standby):	100ABBF0b5
Bootloader (CFE) Version:	1.0.38-116.174
Wireless Driver Version:	7.14.89.14.cpe4.16L03.0-kdb
Voice Service Version:	
Uptime:	0D 0H 29M 42S


This information reflects the current status of your WAN connection.

LAN IPv4 Address:	192.168.1.1
LAN MAC address:	58:8B:F3:7F:4A:47
Default Gateway:	ppp0.1
Primary DNS Server:	115.178.58.10
Secondary DNS Server:	115.178.58.26
LAN IPv6 ULA Address:	
Default IPv6 Gateway:	ppp0.1
Date/Time:	Fri Aug 5 16:01:12 2016

This information reflects the current status of your Optical Signal connection.

Temperature:	36.74 (Celsius)
Voltage:	3.29 (Volts)
Bias Current:	7.25 (mA)
Optical Tx Power:	2.65 (dBm)
Optical Rx Power:	-14.72 (dBm)

4. จากแถบเมนูด้านซ้าย เลือก **Diagnostics** -> **Ping&Traceroute&Nslookup**
5. กำหนด **Address** ของจุดหมายได้ทั้ง 3 แบบ คือ **URL**, **IPv4** และ **IPv6**
6. เลือกกดคำสั่ง **Ping**, **Trace Route** หรือ **Nslookup**
7. ผลของการดำเนินการจะแสดงในกล่องข้อความ **Test result**

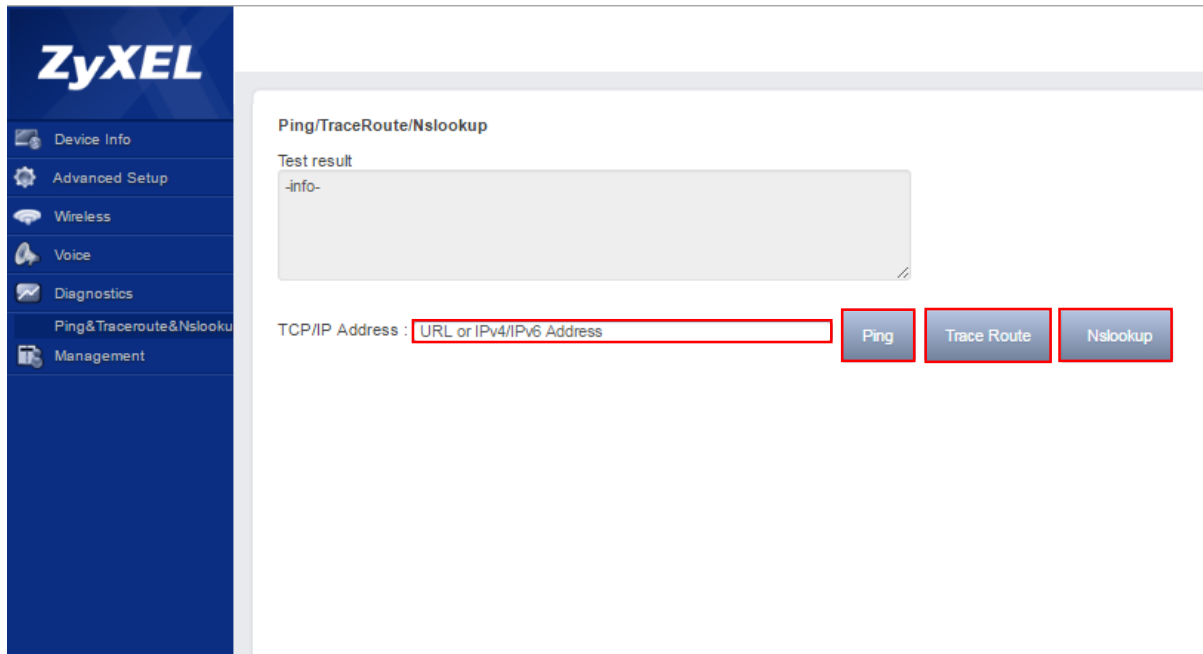

The screenshot shows the ZyXEL web management interface. On the left is a dark blue sidebar with the 'ZyXEL' logo at the top and a list of menu items: 'Device Info', 'Advanced Setup', 'Wireless', 'Voice', 'Diagnostics', 'Ping&Traceroute&Nslookup', and 'Management'. The 'Diagnostics' menu item is highlighted. The main content area has a light gray header with the title 'Ping/TraceRoute/Nslookup'. Below the header, there is a section labeled 'Test result' containing a large, empty text box with a placeholder '-info-'. At the bottom of the main area, there is a label 'TCP/IP Address :' followed by a text input field containing the placeholder 'URL or IPv4/IPv6 Address'. To the right of the input field are three buttons: 'Ping', 'Trace Route', and 'Nslookup', each with a red border.