


การตั้งค่า Dynamic Domain Name Server (DDNS)


1. เปิด Browser พิมพ์ **192.168.1.1** ในช่อง Address แล้วกด **Enter**



2. ใส่ Username: **admin** และ Password: **aisadmin** แล้วกด **Login**

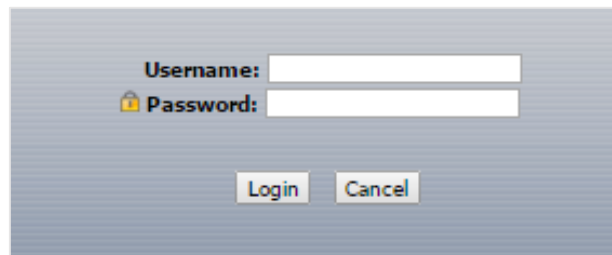

3. หลังจากก่ Login แล้ว จะเข้าสู่หน้า Setup ซึ่งแสดงข้อมูลต่างๆ

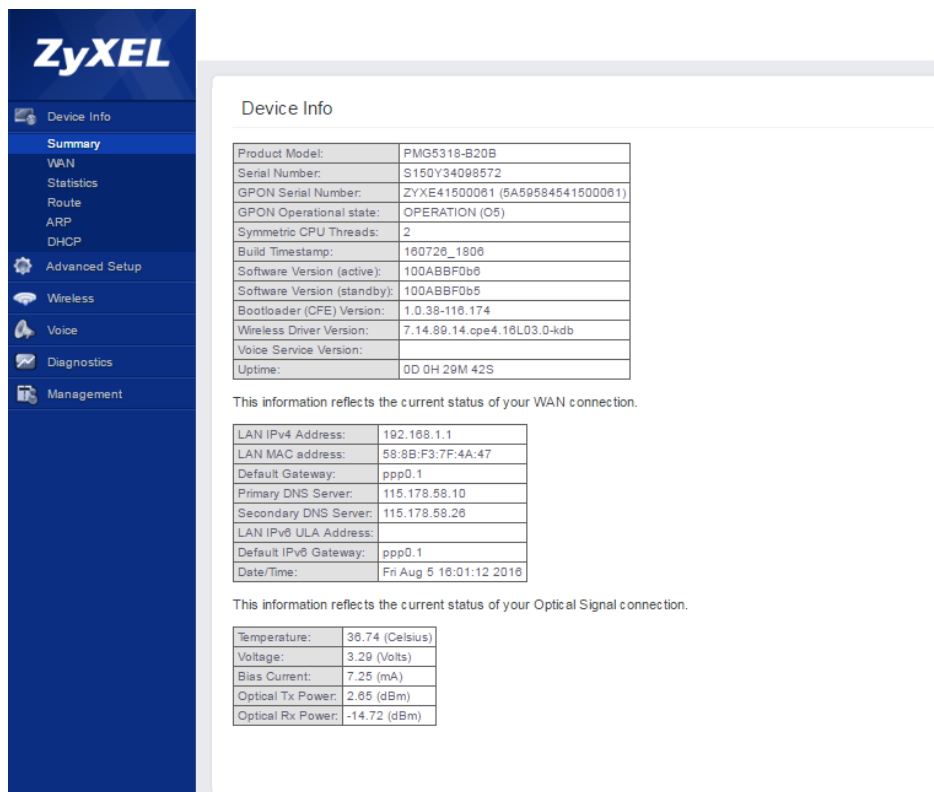

ZyXEL

- Device Info
- Summary
- WAN
- Statistics
- Route
- ARP
- DHCP
- Advanced Setup
- Wireless
- Voice
- Diagnostics
- Management

Device Info

Product Model:	PMG5318-B20B
Serial Number:	S150Y34098572
GPON Serial Number:	ZYXE41500061 (5A59584541500061)
GPON Operational state:	OPERATION (O5)
Symmetric CPU Threads:	2
Build Timestamp:	160726_1806
Software Version (active):	100ABBF0b6
Software Version (standby):	100ABBF0b5
Bootloader (CFE) Version:	1.0.38-116.174
Wireless Driver Version:	7.14.89.14.cpe4.16L03.0-kdb
Voice Service Version:	
Uptime:	0D 0H 29M 42S


This information reflects the current status of your WAN connection.

LAN IPv4 Address:	192.168.1.1
LAN MAC address:	58:8B:F3:7F:4A:47
Default Gateway:	ppp0.1
Primary DNS Server:	115.178.58.10
Secondary DNS Server:	115.178.58.26
LAN IPv6 ULA Address:	
Default IPv6 Gateway:	ppp0.1
Date/Time:	Fri Aug 5 16:01:12 2016

This information reflects the current status of your Optical Signal connection.

Temperature:	36.74 (Celsius)
Voltage:	3.29 (Volts)
Bias Current:	7.25 (mA)
Optical Tx Power:	2.65 (dBm)
Optical Rx Power:	-14.72 (dBm)

4. จากแถบเมนูด้านซ้าย เลือก **Advanced Setup** -> **DNS** -> **Dynamic DNS**
5. กด **Add** เพื่อเพิ่มการตั้งค่า DDNS ใหม่

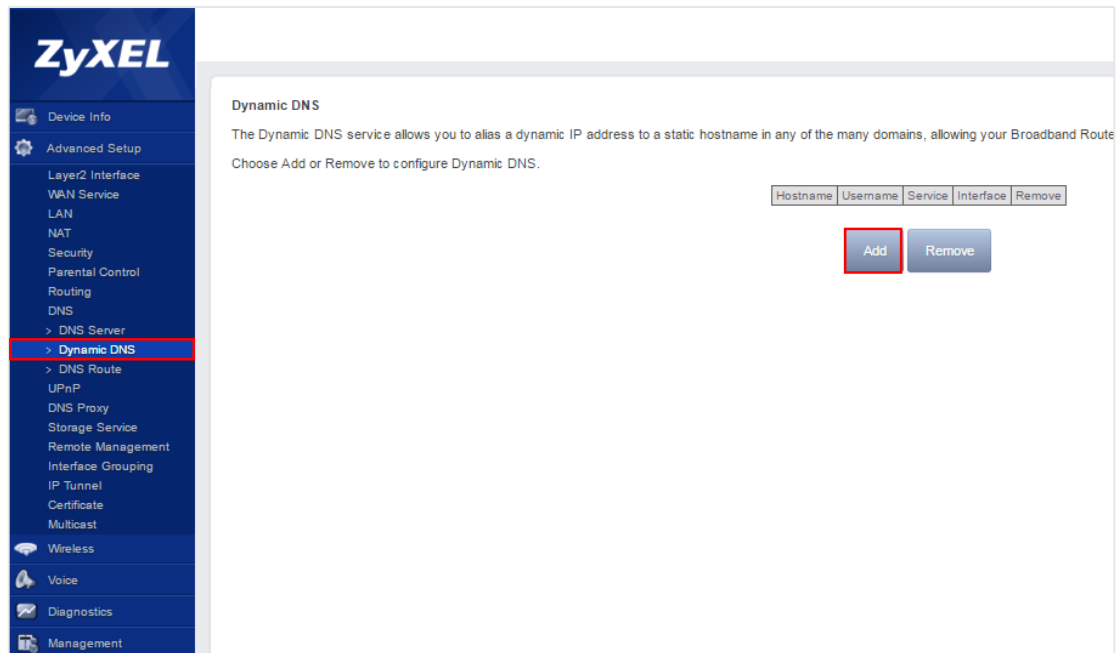

6. กรอกข้อมูลให้ครบถ้วน
 - DDNS provider: เลือกผู้ให้บริการ DDNS ที่สมัครไว้
 - Hostname: Host Name ที่สร้างไว้ในเว็บของผู้ให้บริการ DDNS
 - Interface: เลือก WAN ของ Internet
 - Username: ชื่อผู้ใช้ที่สมัครไว้ในเว็บผู้ให้บริการ DDNS
 - Password: รหัสผ่านที่ผู้ใช้สมัครไว้ในเว็บผู้ให้บริการ DDNS

7. กด Apply เพื่อบันทึกข้อมูล

ZyXEL

- Device Info
- Advanced Setup
 - Layer2 Interface
 - WAN Service
 - LAN
 - NAT
 - Security
 - Parental Control
 - Routing
 - DNS
 - > DNS Server
 - > Dynamic DNS
 - > DNS Route
 - UPnP
 - DNS Proxy
 - Storage Service
 - Remote Management
 - Interface Grouping
 - IP Tunnel
 - Certificate
 - Multicast
- Wireless
- Voice
- Diagnostics
- Management

Add Dynamic DNS

This page allows you to add a Dynamic DNS address from DynDNS.org or No-IP.

D-DNS provider

DynDNS.org

Hostname

Interface

ipoe_veip0.20/veip0.2

DynDNS Settings

Username

Password

Apply/Save