


การตั้งค่า Channel ของ Wireless


1. เปิด Browser พิมพ์ **192.168.1.1** ในช่อง Address แล้วกด **Enter**




2. ใส่ Username: **admin** และ Password: **aisadmin** แล้วกด **Login**

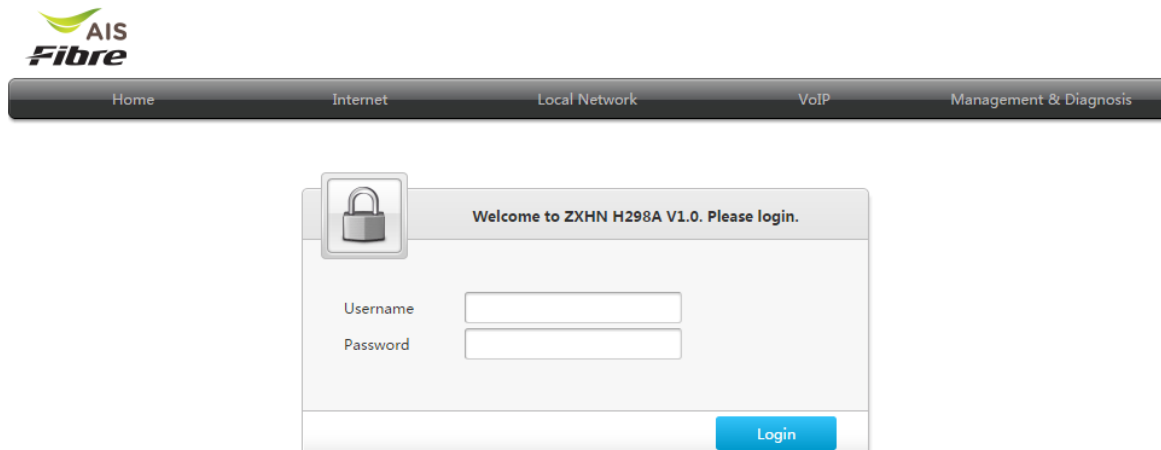

3. เข้าสู่หน้าจอ setup

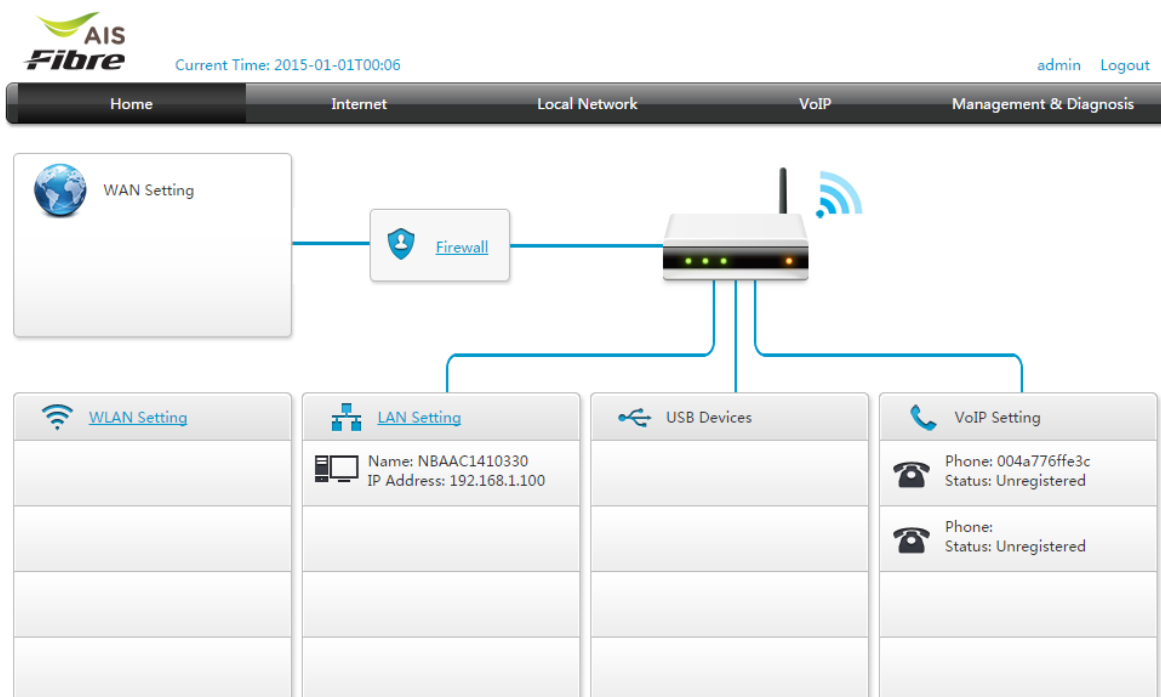


4. จากแถบเมนูหลักด้านบน เลือก **Local Network** -> **WLAN** -> **WLAN Basic**
5. เลือกหัวข้อ **WLAN Global Configuration**

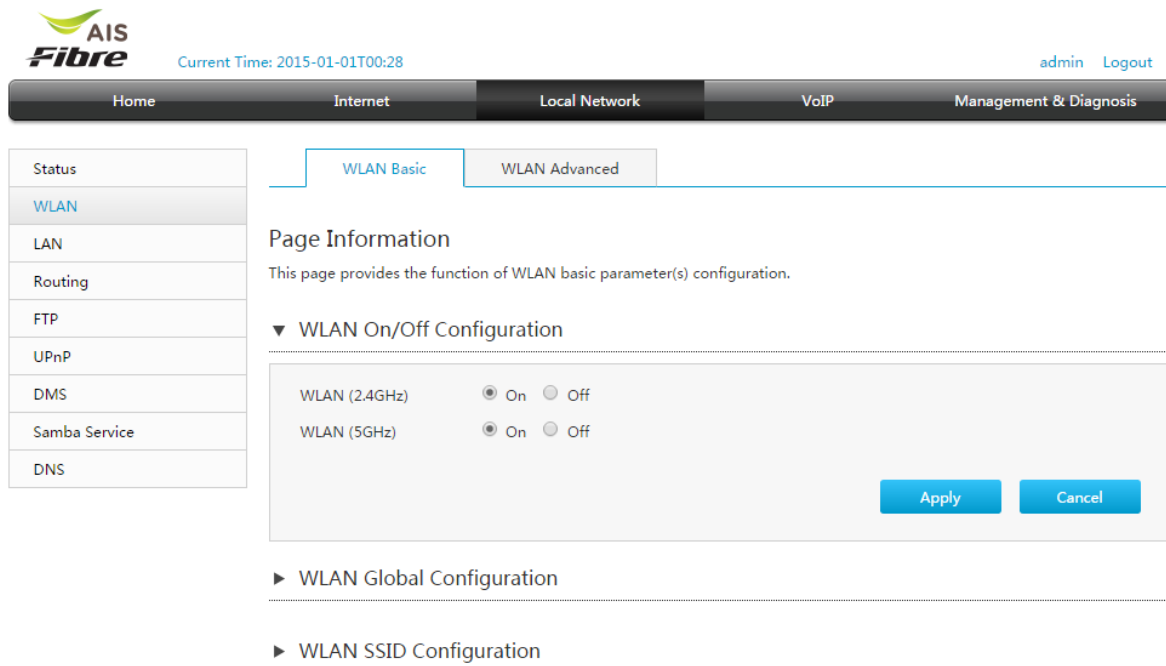

The screenshot shows the AIS Fibre router's web management interface. The top navigation bar includes 'Home', 'Internet', 'Local Network', 'VoIP', and 'Management & Diagnosis'. The 'Local Network' section is active, and the 'WLAN Basic' tab is selected. On the left, a sidebar lists various settings: Status, WLAN (highlighted), LAN, Routing, FTP, UPnP, DMS, Samba Service, and DNS. The main content area is titled 'Page Information' and states: 'This page provides the function of WLAN basic parameter(s) configuration.' Below this, the 'WLAN On/Off Configuration' section has two rows: 'WLAN (2.4GHz)' and 'WLAN (5GHz)', each with 'On' and 'Off' radio buttons. Both are currently set to 'On'. 'Apply' and 'Cancel' buttons are at the bottom right. Below the configuration section, there are links for 'WLAN Global Configuration' and 'WLAN SSID Configuration'.

6. สามารถเลือกระบุ Channel หรือตั้งค่า Channel เป็น Auto ก็ได้ (โหมด Auto จะทำงานเมื่อเปิด Router ครั้งแรก)
7. ปรับเปลี่ยนค่า Band Width เพื่อเพิ่มความกว้างของช่องสัญญาณ

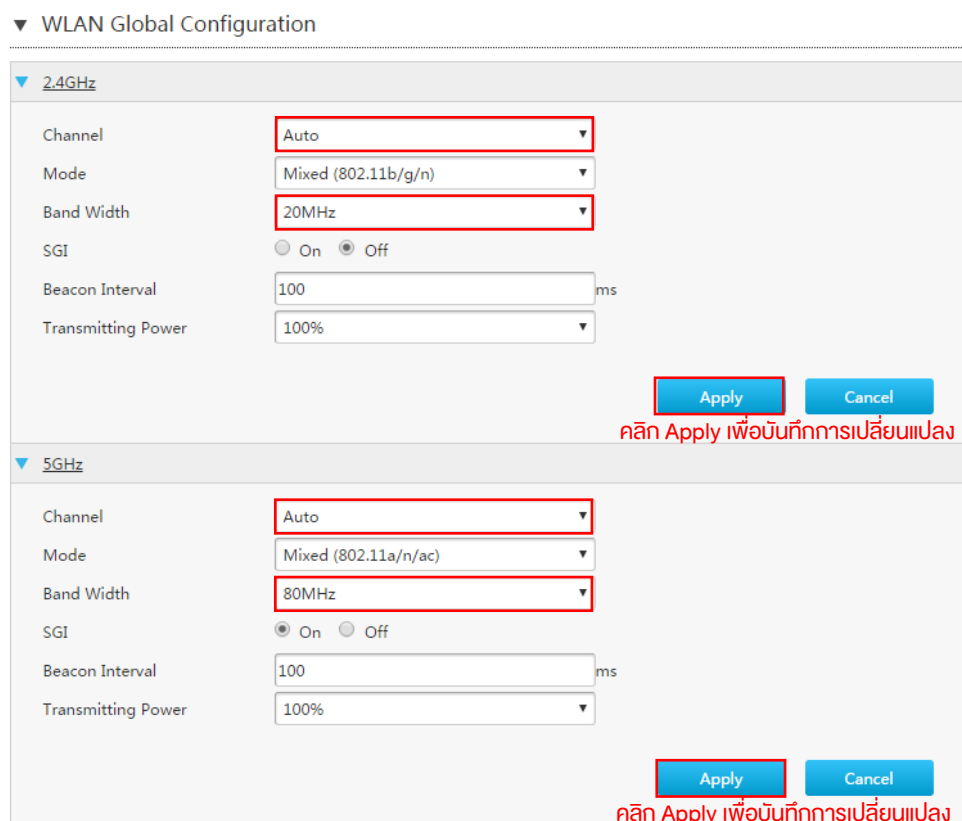

The screenshot shows the 'WLAN Global Configuration' page. It has two main sections: '2.4GHz' and '5GHz'. Each section contains the following settings: Channel (dropdown menu), Mode (dropdown menu), Band Width (dropdown menu), SGI (radio buttons for On/Off), Beacon Interval (text input with 'ms' suffix), and Transmitting Power (dropdown menu). In the 2.4GHz section, 'Channel' is set to 'Auto', 'Mode' is 'Mixed (802.11b/g/n)', and 'Band Width' is '20MHz'. In the 5GHz section, 'Channel' is 'Auto', 'Mode' is 'Mixed (802.11a/n/ac)', and 'Band Width' is '80MHz'. Both sections have 'Apply' and 'Cancel' buttons. Red boxes highlight the 'Channel' and 'Band Width' dropdowns in both sections. Red text at the bottom of each section says 'คลิก Apply เพื่อบันทึกการเปลี่ยนแปลง' (Click Apply to save changes).